

2:1 Mux/DeMux High Bandwidth HDMI™ 2.1 Compliant Signal Switch**Descriptions**

RLCS416 series of switch circuits are targeted for high-resolution video network that are based on DVI/HDMI™ standard, and TMDS signal process. The RLCS416 is an 8- to 4-Channel Mux/DeMux Switch. The device multiplexes differential signals to one of two corresponding outputs. The switch is bidirectional and offers little or no attenuation of the high-speed signals at the outputs. It is designed for low bit-to-bit skew and high channel-to-channel noise isolation.

The high bandwidth provides the resolution required by the next generation HDTV and PC graphics. Three differential channels are used for data (video signals for DVI or audio/video signals for HDMI), and one differential channel is used for Clock for decoding the TMDS signals at the outputs.

Because of its passive bidirectional feature, this switch can be used either at the video drivers side or at the receiver side. For PC graphics applications, the device sits at the drivers side to switch between multiple display units such as LCD monitor, projector, TV, etc. For consumer video applications, the device sits at the receiver end to switch between the source components such as DVD, D-VHS, STB, etc.

The wide voltage range allow DC-coupled multi-standard operation. Eliminating AC coupling capacitors saves board space and improves signal integrity for dense PCB design. The high speed channels can also pass 0V-3.3V CMOS signals up to 1MHz. In addition to four high-speed lanes, RLCS416 also switches the CEC, DDC and HPD signals.

Features

- 4-Differential Channel 2:1 Mux/DeMux
- HDMI 2.1 compatible
- High Bandwidth: 5.7GHz @-3dB BW
- Supports both AC coupled and DC coupled signals
- Isolation: -40dB @ 2.0 Gbps
- Crosstalk: -31dB @ 2.0 Gbps
- ESD Tolerance: 2kV HBM
- Low bit-to-bit skew, Bidirectional
- Supports DDC with HPD channel mux/demux @ HDMI
- Supports 720 Mbps high-speed DP AUX @ DP

Applications

- Routing of HDMI 2.1 video signals with low signal attenuation between source and sink for 4K2K ultra high definition video display and broadcast video equipment.
- Routing of DisplayPort video signals with low signal attenuation between source and sink for PC and monitor.

Order information

Package		Part Number	Quantity per Reel
QFN 9×3.5-42L	Tape and Reel	RLCS416QN42/R6	3000PCS

Block Diagram and Pin Configuration

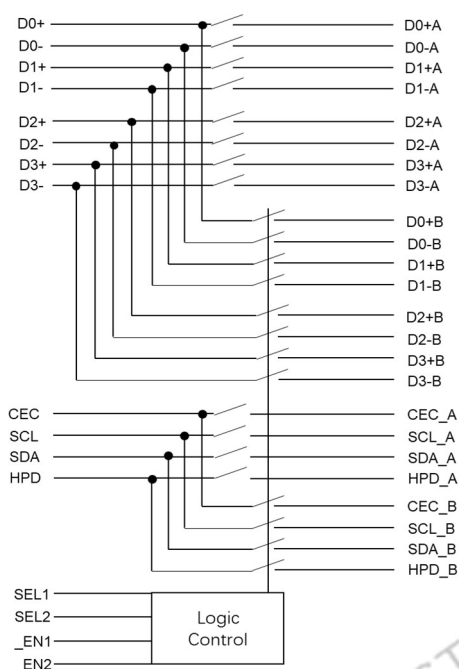


Fig.1 Block Diagram

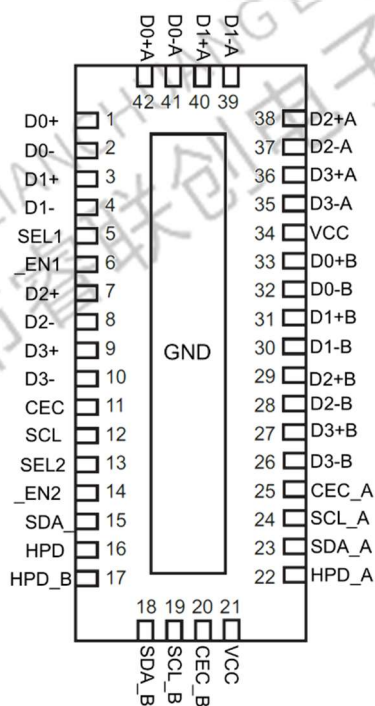


Fig.2 Top-Through View

Truth Table

_EN1	SEL1	D0-D3
High	X	Hi-Z
Low	Low	A
Low	High	B

_EN2	SEL2	CEC	SCL	SDA	HPD
High	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z
Low	Low	A	A	A	A
Low	High	B	B	B	B

Pin Description

Pin#	Pin Name	Signal Type	Description
1	D0+	I/O	Positive differential signal 0 for COM port
2	D0-	I/O	Negative differential signal 0 for COM port
3	D1+	I/O	Positive differential signal 1 for COM port
4	D1-	I/O	Negative differential signal 1 for COM port
5	SEL1	I	Switch logic control
6	_EN1	I	Switch logic control
7	D2+	I/O	Positive differential signal 2 for COM port
8	D2-	I/O	Negative differential signal 2 for COM port
9	D3+	I/O	Positive differential signal 3 for COM port
10	D3-	I/O	Negative differential signal 3 for COM port
11	CEC	I/O	Consumer electronic control for COM port
12	SCL	I/O	DDC clock for COM port
13	SEL2	I	Switch logic control
14	_EN2	I	Switch logic control
15	SDA	I/O	DDC data for COM port
16	HPD	I/O	Hot plug detect for COM port
17	HPD_B	I/O	Hot plug detect for B port
18	SDA_B	I/O	DDC data for port B
19	SCL_B	I/O	DDC clock for port B
20	CEC_B	I/O	Consumer Electronics Control for port B
21	VCC	Power	Supply Voltage
22	HPD_A	I/O	Hot plug detect for port A
23	SDA_A	I/O	DDC data for port A
24	SCL_A	I/O	DDC clock for port A
25	CEC_A	I/O	Consumer Electronics Control for port A
26	D3-B	I/O	Negative differential signal 3 for port B
27	D3+B	I/O	Positive differential signal 3 for port B
28	D2-B	I/O	Negative differential signal 2 for port B
29	D2+B	I/O	Positive differential signal 2 for port B
30	D1-B	I/O	Negative differential signal 1 for port B
31	D1+B	I/O	Positive differential signal 1 for port B
32	D0-B	I/O	Negative differential signal 0 for port B
33	D0+B	I/O	Positive differential signal 0 for port B
34	VCC	Power	Supply Voltage
35	D3-A	I/O	Negative differential signal 3 for port A
36	D3+A	I/O	Positive differential signal 3 for port A
37	D2-A	I/O	Negative differential signal 2 for port A
38	D2+A	I/O	Positive differential signal 2 for port A
39	D1-A	I/O	Negative differential signal 1 for port A
40	D1+A	I/O	Positive differential signal 1 for port A
41	D0-A	I/O	Negative differential signal 0 for port A

42	D0+A	I/O	Positive differential signal 0 for port A
----	------	-----	---

Maximum Ratings

(Above which useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	-65°C to +150°C
Junction Temperature	125°C
Supply Voltage to Ground Potential	-0.5V to +5.5V
High Speed Data Channel D0~D3	-0.5V to 3.8V
CEC, SCL, SDA, HPD	-0.5V to 5.5V
DC Input Voltage	-0.5V to VCC
DC Output Current	120mA
Power Dissipation	0.5W

Notes:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Electrical Characteristics

Parameter			Test conditions ⁽¹⁾	Min	Typ. ⁽²⁾	Max	Unit
PORT A							
R _{ON}	ON-state resistance	D0 to D3	V _{CC} =3V,		6.5	9.5	Ω
		SCL,SDA, HPD,CEC	1.5V≤V _{I/O} ≤V _{CC} , I _{I/O} =-40mA		6	9.5	Ω
R _{ON(flat)}	ON-state resistance flatness	All I/O	V _{CC} =3V, V _{I/O} =1.5V and V _{CC} , I _{I/O} =-40mA		1.5		Ω
ΔR _{ON}	On-state resistance match between high-speed channels	D0 to D3	V _{CC} =3V, 1.5V≤V _{I/O} ≤V _{CC} , I _{I/O} =-40mA		0.4	1	Ω
I _{OFF}	Leakage under power off	All outputs	V _{CC} =0V, V _{I/O} =0V to 3.6V , V _{IN} =V to 5.5V	±10			uA
PORTB							
R _{ON}	ON-state resistance	D0 to D3	V _{CC} =3V,		8.2	10.5	Ω
		SCL,SDA, HPD,CEC	1.5V≤V _{I/O} ≤V _{CC} , I _{I/O} =-40mA		6	9.5	Ω
R _{ON(flat)}	ON-state resistance flatness	All I/O	V _{CC} =3V, V _{I/O} =1.5V and V _{CC} , I _{I/O} =-40mA		1.5		Ω
ΔR _{ON}	On-state resistance match between high-speed channels	D0 to D3	V _{CC} =3V, 1.5V≤V _{I/O} ≤V _{CC} , I _{I/O} =-40mA		0.4	1	Ω
I _{OFF}	Leakage under power off	All outputs	V _{CC} =0V, V _{I/O} =0V to 3.6V , V _{IN} =V to 5.5V			±10	uA
DIGITAL INPUTS(SEL1,SEL2,EN1,EN2)							
V _{IH}	High-level control input voltage	SEL1, SEL2, EN1, EN2		1.4			V
V _{IL}	LOW-level control input voltage					0.5	V
V _{IH}	Digital input high leakage current		V _{CC} =3.6V, V _{IN} =V _{CC}			±10	uA
V _{IL}	Digital input low leakage current		V _{CC} =3.6V, V _{IN} =GND			±10	uA
SUPPLY							
I _{CC}	VCC supply current	V _{CC} =3.6V, I _{I/O} =0,Normal operation mode, _ENx=L			100		uA
I _{CC, PD}	VCC supply current in power-down mode	V _{CC} =3.6V, I _{I/O} =0, _ENx=H			2		uA

Notes:

- V_I, V_O, I_I, and I_O refer to I/O pins, V_{IN} refers to the control inputs.
- All typical values are at V_{CC} = 3.3 V (unless otherwise noted), T_A = 25°C.
- R_(ON/FLAT) is the difference of R_{ON} in a given channel at specified voltages.
- ΔR_{ON} is the difference of R_{ON} from center port to any other ports.

Switching Characteristics (TA= -40℃ to +105℃, VCC=3.3V±10%)

Parameter	Description	Min.	Typ.	Max	Unit
T _{pd}	Propagation delay (input pin to output pin) on all channels		80		ps
t _{b-b}	Bit-to-bit skew within the same differential pair of Dx± channels		5	7	ps
t _{ch-ch}	Channel-to-channel skew of Dx+ channels			35	ps
Tsw a-b	Time it takes to switch from port A to port B			0.1	us
Tsw b-a	Time it takes to switch from port B to port A			0.1	us
Tstartup	VCC valid to channel enable			10	us
Twakeup	Enabling output by changing OE from low to High			10	us

Dynamic Electrical Characteristics Over Operating Range (TA= -40° to +105°C,
VCC=3.3V±10%)

Parameter	Description	Test conditions	Min.	Typ.	Max	Unit
XTALK	Crosstalk on High Speed Channels	See Fig.3 for Measurement setup	f = 3.0GHz		-25	-22
			f = 2.7GHz		-28	-25
			f = 1.7GHz		-31	-28
			f = 1.35GHz		-32	-28
OIRR	OFF Isolation on High Speed Channels	See Fig.4 for Measurement setup	f = 3.0GHz		-22	-20
			f = 2.7GHz		-22	-20
			f = 1.7GHz		-29	-26
			f = 1.35GHz		-30	-27
ILOSS	Different Insertion Loss on High Speed Channels	@3.0GHz(see Fig.5)	-2.0	-1.7		dB
		@5.4GHz(see Fig.5)	-2.0	-1.7		
RLOSS	Different Return Loss on High Speed Channels	@3.0GHz(6.0Gbps)		-	-14	dB
		@2.7GHz(5.4Gbps)		-	-	
BW	Bandwidth -3dB	see Fig.5		5.7		GHz

Note:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at VCC=3.3V,TA=25°C ambient and maximum loading.

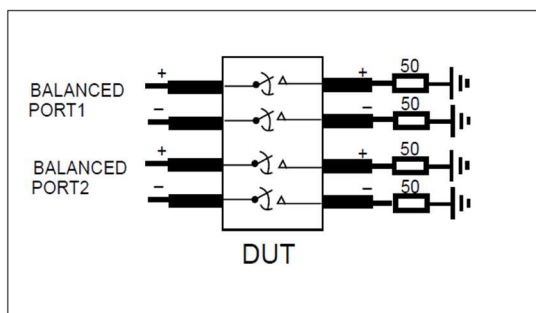


Fig.3 Crosstalk Setup

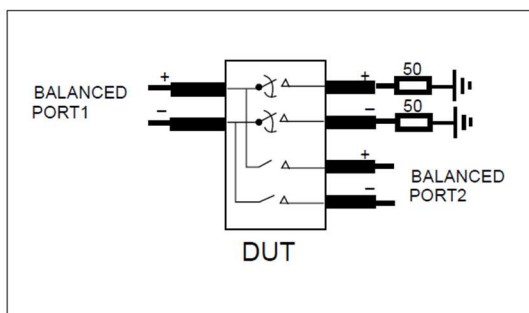


Fig.4 OFF-isolation


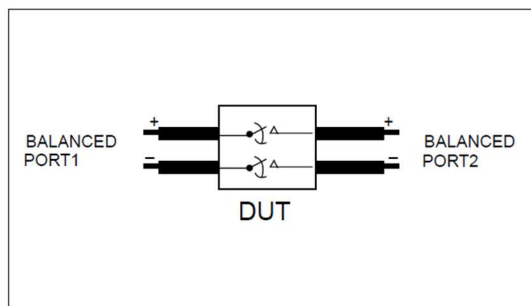


Fig.5 Different Insertion Loss

SHENZHEN RUILIANCHUANG ELECTRONIC CO.,LTD
深圳市睿联创电子有限公司

Package Outline Dimensions

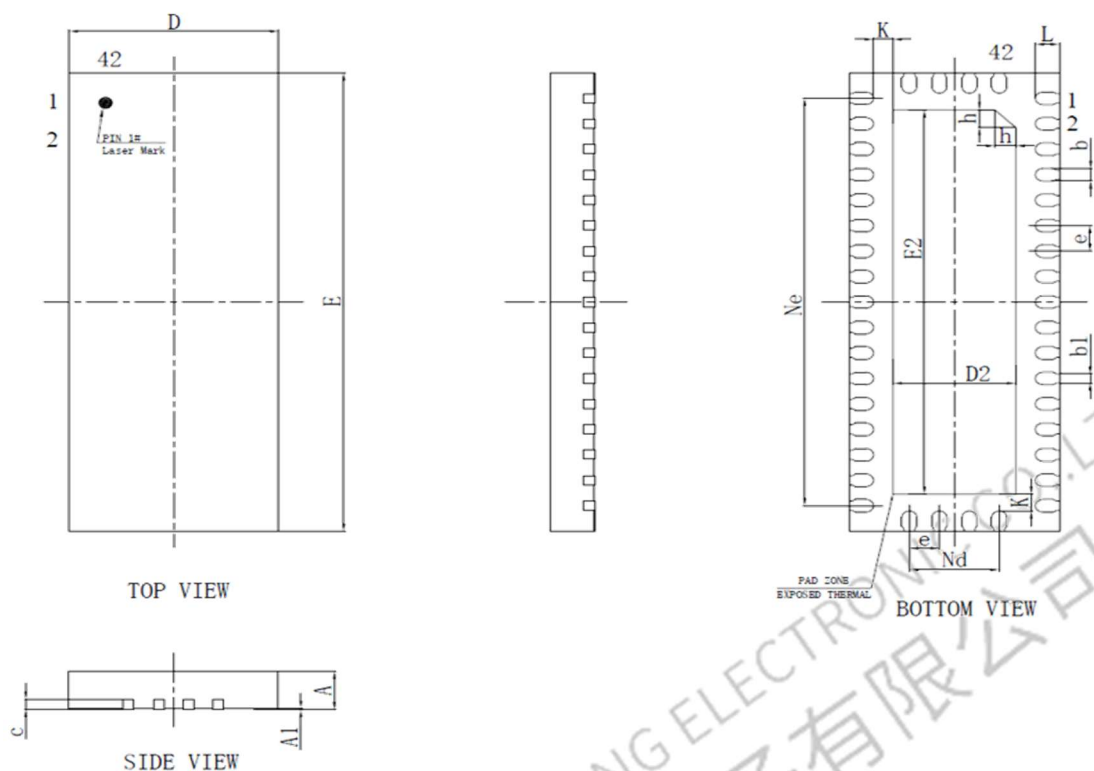

Package Mechanical:42-Pin

Symbol	Millimeter		
	Min	Nom	Max
A	0.70	0.75	0.80
A1	0	0.02	0.05
b	0.20	0.25	0.30
b1	0.18REF		
c	0.203REF		
D	3.40	3.50	3.60
D2	1.95	2.05	2.15
e	0.50BSC		
Nd	1.50BSC		
E	8.90	9.00	9.10
E2	7.45	7.55	7.65
Ne	8.00BSC		
L	0.35	0.40	0.45
h	0.30	0.35	0.40
K	0.325REF		

Important Note

As the RLC product continues to improve gradually, we may experience significant changes. RLC reserves the right to correct, modify, enhance, and amend the products and services they provide, as well as the right to discontinue any product or service. Before placing an order, customers should obtain the latest information to verify that it is current and complete. All products sold must comply with RLC's terms and conditions in order to ensure proper processing of orders. RLC guarantees that the products they sell conform to the terms and conditions applicable to semiconductor sales. Only under this guarantee does RLC consider it necessary to employ testing and quality control measures for their products. Unless mandated by applicable laws requiring strict compliance, there is no obligation for testing all product parameters. RLC does not assume responsibility for customer product design or application. The materials provided contain circuit examples and usage methods solely for reference purposes; they do not guarantee suitability for volume production designs. Additionally, these materials may contain errors that could result in damages incurred by customers; therefore, RLC disclaims any liability in such cases. Customers are advised to use products within the limits specified in these materials while paying particular attention to absolute maximum ratings, operating voltages, and voltage characteristics. Any use of products outside of these specifications absolves RLC from responsibility; customers must accept full responsibility themselves. To minimize risks associated with customer-designed applications, adequate design safety measures should be implemented. When using RLC products, please ensure compliance with relevant laws and regulations pertaining to your country or region regarding application standards as well as testing requirements related to safety performance. For exports of RLC products overseas, it is essential that you adhere strictly to foreign exchange regulations and transaction laws throughout all necessary procedures involved in exportation processes. In case of disposal of any abandoned RLC product(s), please follow appropriate rules and regulations for proper disposal.

RLC products are not designed to be radiation - resistant. Based on the intended usage, customers can incorporate radiation protection measures during the product design process. Under normal circumstances, RLC products do not harm human health. However, since they contain chemicals and heavy metals, do not put them in your mouth. Additionally, the fracture surfaces of wafers and chips can be sharp. When touching them with bare hands, please be careful to avoid injury. Semiconductor products have a certain probability of failure or malfunction. To prevent disruptions and social damages resulting from personal accidents, fire accidents, etc., as well as to avoid malfunctions, customers are required to be responsible for comprehensive design, implementing fire - spread prevention measures, and safety design against misoperation. Please conduct a full assessment of the entire system, and customers can determine its applicability on their own.

This material also includes content related to the company's copyright and know - how. The records in this material are not intended to promise or guarantee the implementation and use of the company's and third - party intellectual property and other rights. Without the permission of our company, it is strictly prohibited to reprint, copy any part of this work, or disclose the material information to third parties.

RLC shall not be held responsible for any damage or harm that occurs which is not related to the product itself, as well as for any infringement of third - party rights such as intellectual property rights.

For more details about this material, please contact our sales office.