

Descriptions

The RLCS4000 is a bidirectional low-power dual port, high-speed, USB 2.0 analog switch with integrated protection for USB Type-C™ systems. The device is configured as a dual 2:1 or 1:2 switch. It is optimized for use with the USB 2.0 DP/DM lines in a USB Type-C™ system. The RLCS4000 integrated over-voltage protection on the C0+/- pins can withstand up to DC 30V with automatic shutoff circuitry in order to protect system components behind the switch. GPIO controls of SEL and _EN are 1.8V logic compatible. The RLCS4000 is available in UQFN 1.4x.18-10L with Pb-free and Halogen-free making it a perfect candidate for mobile and space constrained applications.

Features

- Supply Range 2.5 V to 5.5 V
- Differential 2:1 or 1:2 Switch/Multiplexer
- Up to DC 30V Overvoltage Protection (OVP) on C0+/- Ports
- IEC 64000-4-5 Surge Protection w/o External TVS onto C0+/- Ports: $\pm 30V$
- System Side Clamp Voltage Pulse Less than 9V, Duration Less than 200nS
- Powered Off Protection When VDD = 0 V
- Low RON of 10 Ω Typical
- Insertion loss: -1dB@200MHz, -2dB@650MHz, -3dB@1GHz
- CON of 4.8 pF , 1.8-V Compatible Logic Inputs,
- Standard Temperature Range of 0°C to 85°C

Applications

- Anywhere a USB Type-C™
- Micro-B Connector is Used
- Mobile Phones
- Tablets and Notebooks

Functions and Pin Configuration

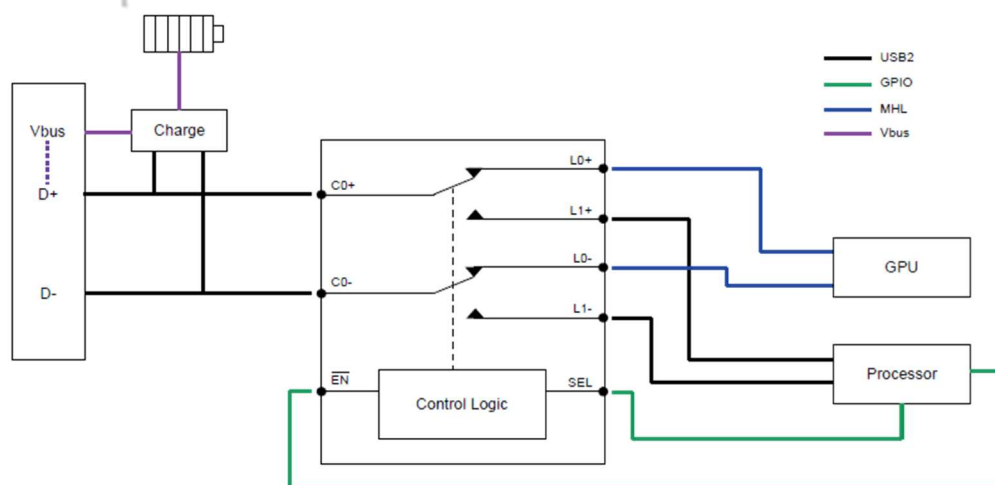


Fig.1 Functional Diagram

Pin Configuration

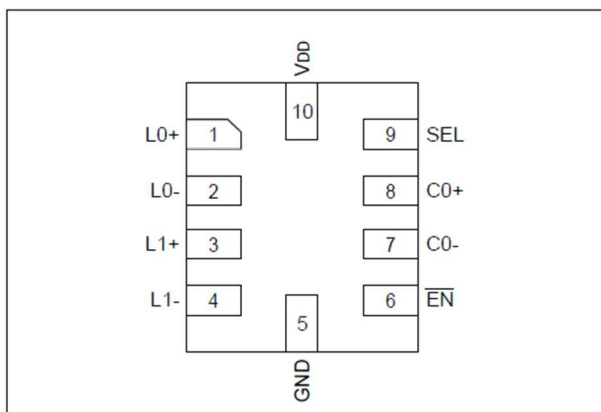


Fig.2 UQFN 1.5x2.0-10L

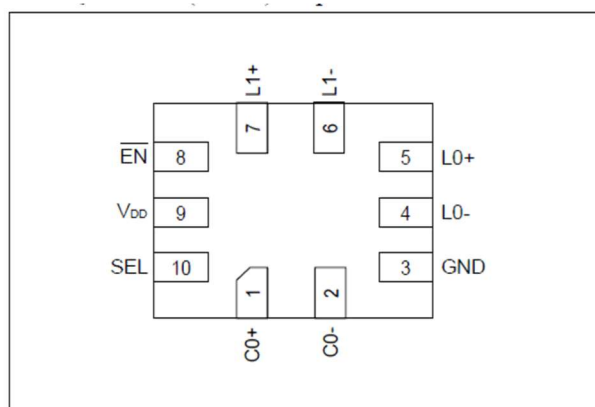


Fig.3 UQFN 1.4x1.8-10L

Pin Descriptions

| UQFN1.6x2.1-10L | UQFN1.4x1.8-10L | Pin Name | Signal Type | Description |
|-----------------|-----------------|----------|-------------|--|
| 8 | 1 | C0+ | I/O | Signal I/O, Common Port |
| 7 | 2 | C0- | I/O | Signal I/O, Common Port |
| 3 | 7 | L1+ | I/O | Signal I/O, Channle 1 |
| 4 | 6 | L1- | I/O | Signal I/O, Channle 1 |
| 1 | 5 | L0+ | I/O | Signal I/O, Channle 0 |
| 2 | 4 | L0- | I/O | Signal I/O, Channle 0 |
| 9 | 10 | SEL | I | Operation Model Select (when SEL=0: C0→L0, when SEL=1: C0→L1) |
| 6 | 8 | _EN | I | _EN=1, Power Down is Enabled. |
| 10 | 9 | VDD | PWR | Positive Supply Voltage |
| 5 | 3 | GND | GND | Power Ground |

Table-1 Pin Descriptions

Truth Table

| Function | SEL | _EN |
|-------------------|-----|-----|
| C0+/- to L0+/- | L | L |
| C0+/- to L1+/- | H | L |
| All Switches Hi-Z | X | L |

Table-2 Truth Table

Order Information

| Package | | Part Number | Quantity per Reel |
|-------------------|---------------|----------------|-------------------|
| UQFN 1.4x1.8 -10L | Tape and Reel | RLCS4000AQN/R6 | 3,000PCS |
| UQFN 1.5x2.0 -10L | Tape and Reel | RLCS4000BQN/R6 | 3,000PCS |

Electrical Characteristics (Ta=25°C, VDD=3.3V, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|--------------------|--|------|------|------|------|
| POWER SUPPLY | | | | | | |
| Supply Voltage Range | VDD | | 2.5 | 3.3 | 5.5 | V |
| Supply Current | I _{CC} | <u>EN =1 disconnection</u> | | 5 | 13 | uA |
| | | <u>EN =0 connection</u> | | 33 | 60 | uA |
| SEL/ <u>EN DIGITAL INPUT CONTROL</u> | | | | | | |
| control input logic high | V _{IH} | | 1.6 | | 5.5 | V |
| control input logic low | V _{IL} | | -0.1 | | 0.5 | V |
| Internal pull-down resistor | R _{PD} | | | 2 | | MΩ |
| SWITCH ON RESISTANCE AND OFF LEAKAGE | | | | | | |
| On-Resistance | R _{ON} | V _{IS} = 0V~0.4V I _{OUT} =8mA | | 10 | 11 | Ω |
| R _{ON} Flatness ⁽¹⁾ | R _{FLAT} | V _{IS} = 0V~0.4V I _{OUT} =8mA | | 0.3 | 0.5 | Ω |
| R _{ON} Matching Between Channels ⁽²⁾ | ΔR _{ON} | V _{IS} = 0V~0.4V I _{OUT} =8mA | | 0.1 | 0.2 | Ω |
| OFF Leakage Current | I _{LEAK} | V _{C0+/-} = 10V V _{L1+/-} = V _{D2+/-} =0V | | 31 | 50 | uA |
| SWITCH DYNAMICS | | | | | | |
| On Capacitance | C _{ON} | V _{C0+/-} = 0.2V, f = 1MHz | | 4 | | pF |
| Off Capacitance | C _{OFF} | V _{C0+/-} = 0.2V, f = 1MHz | | 3 | | pF |
| Off Isolation | Off | f = 250MHz, R _T = 50Ω, C _L = 0pF | | -38 | | dB |
| Crosstalk ⁽³⁾ (Channel-to-Channel) | X _{TALK} | f = 250MHz, R _T = 50Ω, C _L = 0pF | | -41 | | dB |
| -3dB Bandwidth | BW | R _T =50Ω, C _L =0pF Signal Power 0dBm | 1.0 | 1.1 | | GHz |
| Break-Before-Make | BBM | V _{L1+/-} = V _{D2+/-} = 0.4V, R _L =50Ω | | 1.5 | | uS |
| Turn-on Time | t _{OFF} | V _{C0+/-} = 0.4V, R _L =50Ω <u>EN switches from High to Low</u> | | 20 | | uS |
| Turn-off Time | t _{OFF} | V _{C0+/-} = 0.4V, R _L =50Ω <u>EN switches from Low to High</u> | | 1.2 | | uS |
| Propagation Delay | t _{PD} | V _{C0+/-} = 0.4V, R _L =50Ω | | 200 | | pS |
| OVER VOLTAGE PROTECTION | | | | | | |
| OVP Lockout Threshold | V _{OVP} | V _{C0+/-} Rising Edge | 4.6 | 4.9 | 5.2 | V |
| OVP Hysteresis | V _{HYS} | V _{C0+/-} Falling Edge | | 200 | | mV |
| Clamp Voltage on L1+/- and D2+/- | V _{CLAMP} | 10V shorts to C0+/- with R _L =1KΩ @ L1+/- and D2+/- | | 6.5 | 8 | V |
| OVP Response Time | t _{FP} | 10V shorts to C0+/- with R _L =1KΩ @ L1+/- and D2+/- | | 200 | 300 | nS |
| OVP Recovery Time | t _{FPR} | V _{C0+/-} jumps from 6V to 1V step | 30 | 45 | 60 | uS |

Table-4 Electrical Characteristics

Note:

- (1) Flatness is defined as the difference between maximum and minimum value of ON-resistance at the specified analog signal voltage points.
- (2) RON matching between channels is calculated by subtracting the channel with the lowest max Ron value from the channel with the highest max Ron value.
- (3) Crosstalk is inversely proportional to source impedance

Typical Performance Curves (Ta=25°C, VDD=3.0V, CAP=0.1uF, unless otherwise noted)

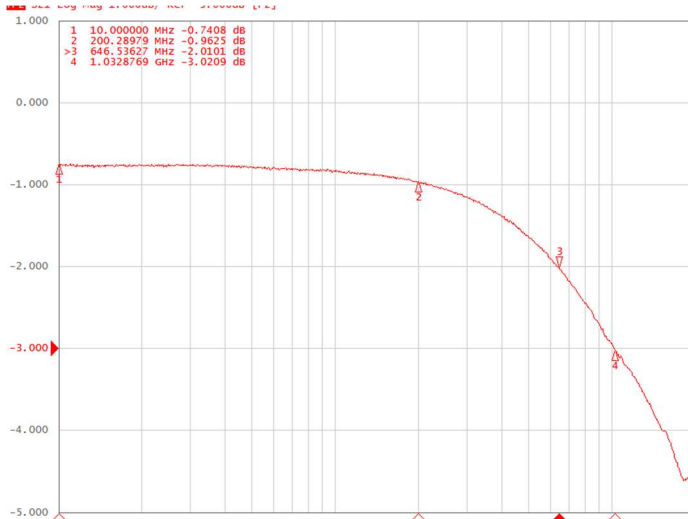


Fig.1 Switch Bandwidth or Insertion Loss

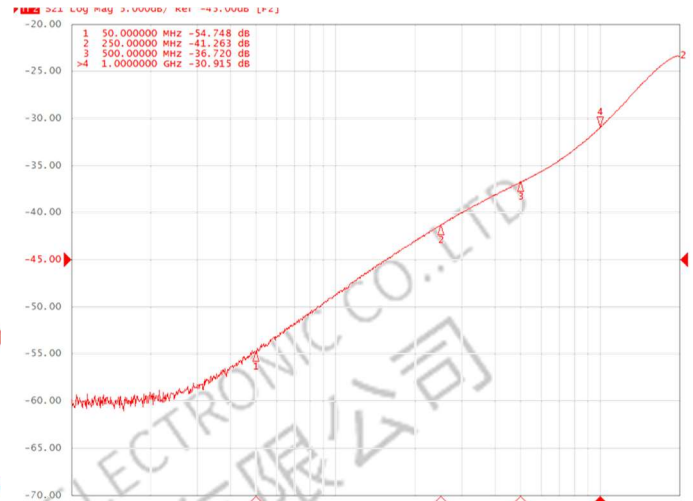


Fig.2 Switch Channel to Channel Cross-Talk


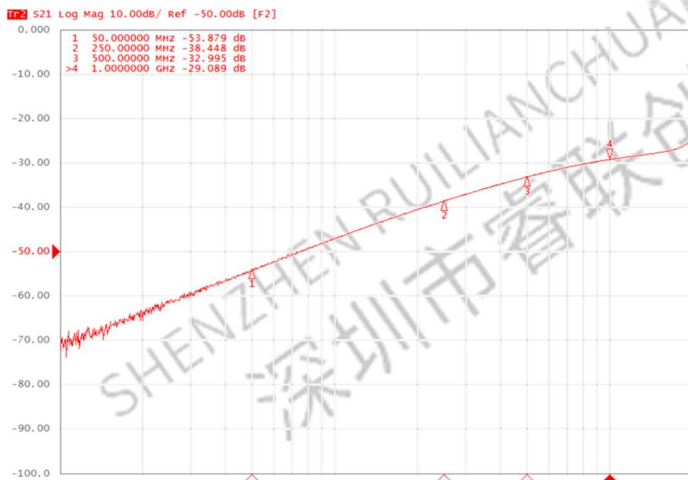


Fig.3 Switch Off Isolation

Package Outline Dimensions


UQFN 1.4x1.8 -10L

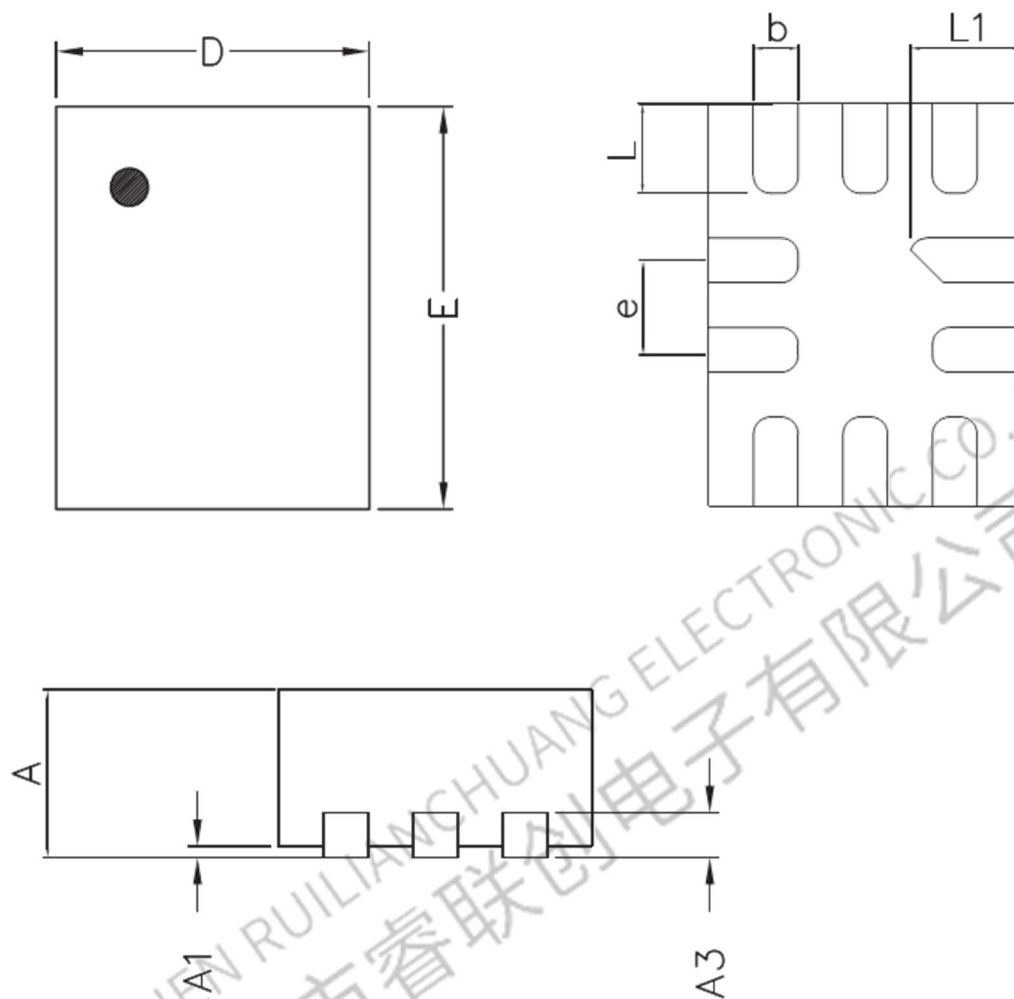

| Symbol | Dimension in Millimeters | |
|--------|--------------------------|-------|
| | Min. | Max. |
| A | 0.450 | 0.550 |
| A1 | 0.000 | 0.050 |
| A3 | 0.152 Ref. | |
| D | 1.350 | 1.450 |
| E | 1.750 | 1.850 |
| b | 0.150 | 0.250 |
| e | 0.400 Typ. | |
| L | 0.350 | 0.450 |
| L1 | 0.450 | 0.550 |

Package Outline Dimensions

UQFN 1.5x2.0 -10L

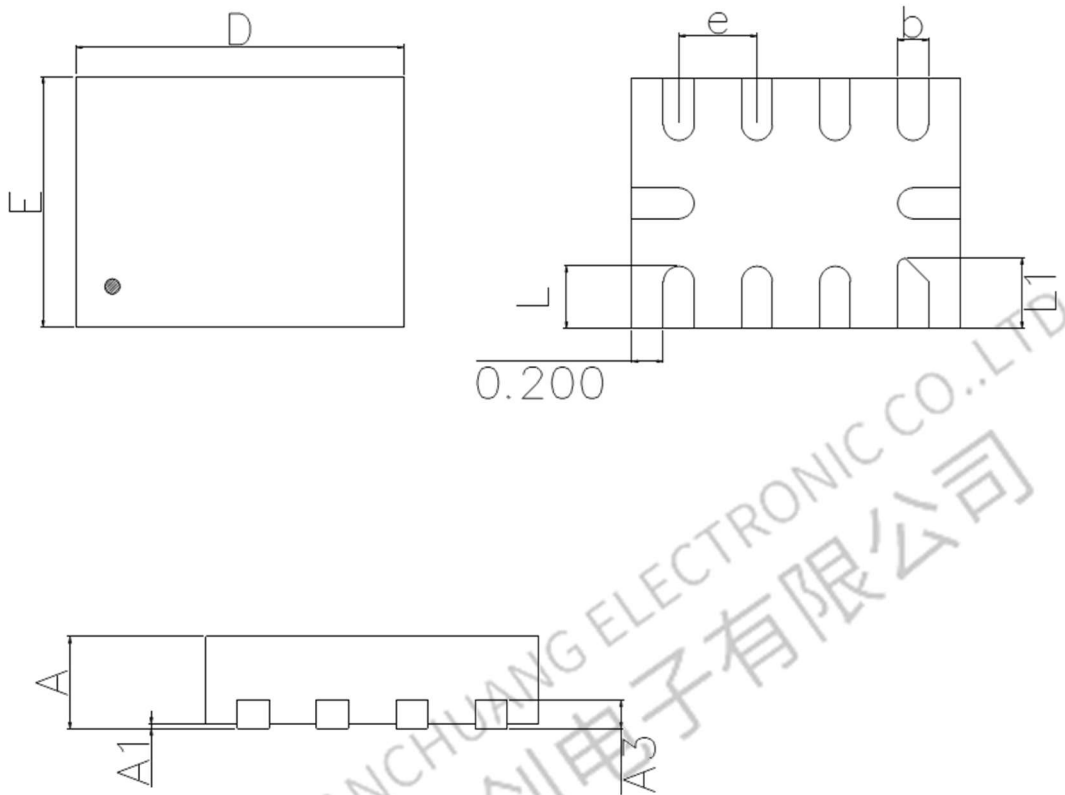

| Symbol | Dimension in Millimeters | | |
|--------|--------------------------|-------|-------|
| | Min. | Typ. | Max. |
| A | 0.500 | 0.550 | 0.600 |
| A1 | 0.000 | | 0.050 |
| A3 | 0.150 Ref. | | |
| D | 1.950 | 2.000 | 2.050 |
| E | 1.450 | 1.500 | 1.550 |
| b | 0.150 | 0.200 | 0.250 |
| e | 0.500 (BSC) | | |
| L | 0.300 | 0.350 | 0.400 |
| L1 | 0.350 | 0.400 | 0.450 |

Important Note

As the RLC product continues to improve gradually, we may experience significant changes. RLC reserves the right to correct, modify, enhance, and amend the products and services they provide, as well as the right to discontinue any product or service. Before placing an order, customers should obtain the latest information to verify that it is current and complete. All products sold must comply with RLC's terms and conditions in order to ensure proper processing of orders. RLC guarantees that the products they sell conform to the terms and conditions applicable to semiconductor sales. Only under this guarantee does RLC consider it necessary to employ testing and quality control measures for their products. Unless mandated by applicable laws requiring strict compliance, there is no obligation for testing all product parameters. RLC does not assume responsibility for customer product design or application. The materials provided contain circuit examples and usage methods solely for reference purposes; they do not guarantee suitability for volume production designs. Additionally, these materials may contain errors that could result in damages incurred by customers; therefore, RLC disclaims any liability in such cases. Customers are advised to use products within the limits specified in these materials while paying particular attention to absolute maximum ratings, operating voltages, and voltage characteristics. Any use of products outside of these specifications absolves RLC from responsibility; customers must accept full responsibility themselves. To minimize risks associated with customer-designed applications, adequate design safety measures should be implemented. When using RLC products, please ensure compliance with relevant laws and regulations pertaining to your country or region regarding application standards as well as testing requirements related to safety performance. For exports of RLC products overseas, it is essential that you adhere strictly to foreign exchange regulations and transaction laws throughout all necessary procedures involved in exportation processes. In case of disposal of any abandoned RLC product(s), please follow appropriate rules and regulations for proper disposal.

RLC products are not designed to be radiation - resistant. Based on the intended usage, customers can incorporate radiation protection measures during the product design process. Under normal circumstances, RLC products do not harm human health. However, since they contain chemicals and heavy metals, do not put them in your mouth. Additionally, the fracture surfaces of wafers and chips can be sharp. When touching them with bare hands, please be careful to avoid injury. Semiconductor products have a certain probability of failure or malfunction. To prevent disruptions and social damages resulting from personal accidents, fire accidents, etc., as well as to avoid malfunctions, customers are required to be responsible for comprehensive design, implementing fire - spread prevention measures, and safety design against misoperation. Please conduct a full assessment of the entire system, and customers can determine its applicability on their own. This material also includes content related to the company's copyright and know - how. The records in this material are not intended to promise or guarantee the implementation and use of the company's and third - party intellectual property and other rights. Without the permission of our company, it is strictly prohibited to reprint, copy any part of this work, or disclose the material information to third parties. RLC shall not be held responsible for any damage or harm that occurs which is not related to the product itself, as well as for any infringement of third - party rights such as intellectual property rights.

For more details about this material, please contact our sales office.